

GRILL TABLE SPECIFICATIONS

models/sizes:

TS-35 | 35-1/2" Ø x 28¾" H (90 cm x 73 cm)

TS-47 | 47" Ø x 28¾" H (120 cm x 73 cm)

~346 sq/inch HOT cooking center incl. warming

TS-56 | 56" Ø x 28¾" H (143 cm x 73 cm)

Custom-made to order.

INDOOR + OUTDOOR USE | IPX4 RATED

Material: Professional Food Grade Best Alloy
German Stainless Steel type 304 (V2A)
5/32" thick (4 mm) cold pressed, hand-welded.
Built-to-last. Elegant silk-brushed finish.

Power: 230V / 1800 W / 8A

230V / 2250 W / 10A

230 V / 2500 W / 11A

Analog infinitely variable temperature control:

1-10 dial | 2 indicator lights | thermostat

Contact Heat: 130°F to 450°F (55° to 230°C)



- 1 COLD DINING AREA
- 2 HOT COOKING CENTER
- 3 POWER CORD RECEPTACLE
at rear of control box
- 4 INDICATOR LIGHTS control box



CE/ GS/ VDE approved. Electrical + electronic
Components: UL approved.




Custom sizes on request.

Shipping Weight per skid/ea:

TS-90 : 125 lbs (56.7 kg)

TS-150: 210 lbs (95.5 kg)

Manufacturer reserves the right to alter, update or discontinue any model without further notice.

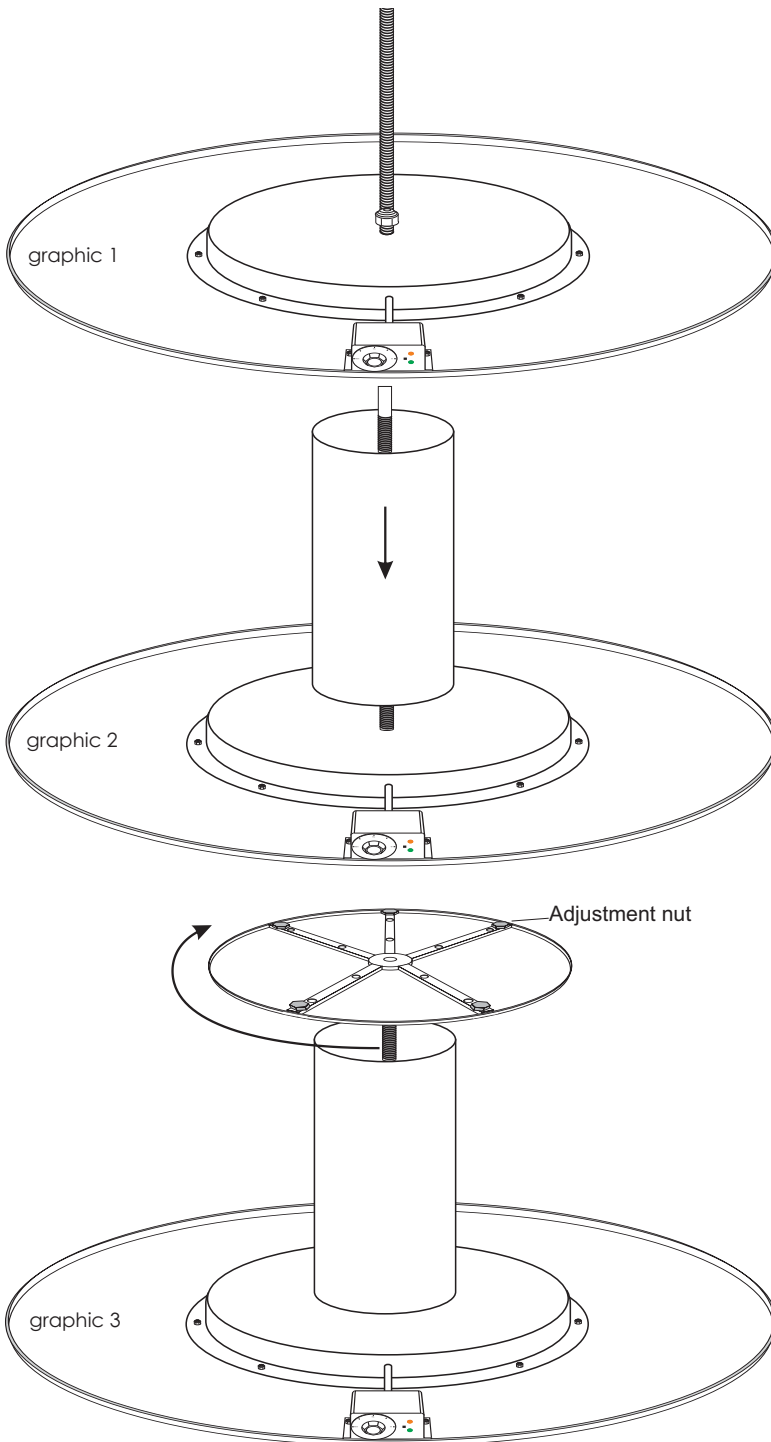

Step 1: Open the box/remove lid. Tabletop is laying bottom up in the box. Remove packaging from threaded rod (packed separately).

Leave tabletop in the box to protect the surface from scratching during assembly.

If provided, place metal plate on top of the heating element enclosure and align the holes. Insert the threaded rod (nut down) into the designated centered hole. Turn the rod clockwise until hand-tight and nut is flush with the heating element. Do not use power tools! (graphic 1).

Step 2: Slide the stand (tube) over the threaded rod, guiding the rod carefully through the designated holes in each inner brackets at either end of the stand/tube. (graphic 2)

Step 3: Turn the pedestal disk upside down, position the designated hole on top of the threaded rod. Turn pedestal clockwise while supporting it with your hands until it is firmly connected with the stand and the top of the table.

Step 4: Turn the now fully assembled table to its upright position and level it by rising or lowering the respective adjustment nuts at the underside of the pedestal disk. Check voltage label. Now connect the power cord to table and then to respective three prong grounded power outlet.

